


**XP195 Installation Diagram**

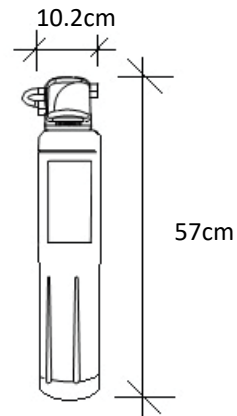

Remember to replace the filter every 4 months depending on the water hardness and usage.

### Installation Instruction

1. Connect the water pressure limiting to WA-MC0604 (B) connector.
2. Connector the pressure limiting valve to water supply (isolation valve).
3. Connect the 3/8" male x 3/8" tube connector to the XP195 filter
4. Mount the XP195 system to the wall. Make sure the filter is easy to access for future filters replacement.
5. Measure and cut the 3/8" tube between the pressure valve and the XP195 system. Connect the tube by inserting into the connectors firmly.
6. Measure the distance between the XP195 waste connector and the coffee machine and cut the tube to the size measured.
7. Connect the 1/2" female connector to the coffee machine.
8. Insert the 3/8" to the XP195 and then to the coffee machine

### System start-up

1. Check to make sure everything is connected firmly. Any weak connection can cause water to leak.
2. Slowly turn on the water supply isolation valve.
3. Check for any leak.
4. The water started to fill the coffee boiler tank in a couple of minutes.
5. Once the tank is full, you can start up the coffee machine.